


# LUMISTAR

## LS-50-e PCIe Multi-function PCM Decommutator Data Sheet

### Description:

The Lumistar LS-50-e PCIe Multi-function PCM Decommutator offers a PCM decom, PCM simulator, time code reader/generator, and optional bit synchronizer in a single short PCIe card slot. The multi-function decom and simulator are implemented in FPGA using a next generation design based on the LS-50-P. The simulator, decommutator, time code reader and time code generator are achieved on the main board and the bit synchronizer is achieved through an optional low-profile daughterboard. CVSD voice decoding, h.261 video decoding, and IRIG Chapter 8 decoding are achieved through software.

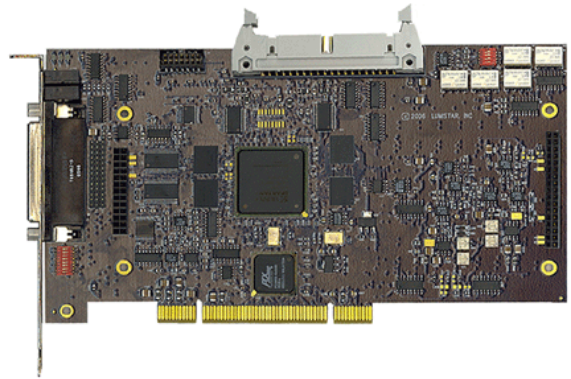

The IRIG Time Code Reader and Generator operate with IRIG A, B, or G time codes. The Time Code Reader is typically used to insert time information into the PCM minor frame block of data. The Time Code Generator creates and outputs time information in accordance with the IRIG Time Code Standards. Both reader and generator are capable of operating at 1/2, 1, and 2 times the normal rate.

The Decom can be used for extremely large formats (65,536 words per minor frame up to 1,024 frames deep) and contains dual ping-pong data output buffers with up to 128K bytes of memory.

The PCM simulator generates common, unique, and waveform pattern data words or pseudo-random test pattern (11 through 25 bit) to allow bit error loop calculations to be performed. Five-pole Butterworth pre-modulation filtering is provided with 16 selectable data rates from 100 Kbps to 20 Mbps which complies with the IRIG telemetry filtering requirements.

### Key Features:

- PCIe Multifunction PCM Decommutator containing
  - PCM Simulator with pre-mod filtering and BERT generating capability
  - PCM Simulator or BERT generating modes
  - PCM Decommutator with BERT reading capability
  - IRIG Time Code Reader and IRIG Time Code Generator
- LS-40-DB Bit Synchronizer Daughterboard - Optional (10, 20 or 25 Mbps)
- CVSD Voice, h.261 Video and IRIG Chapter 8 Decoding through LDPS-Pro Software
- Short PCIe Board only 7.55 inches long

## **SPECIFICATIONS:**

### **PCM DECOMMUTATOR:**

Input Data Rate	64 bps to 20 Mbps
Input Signals	NRZ-L data & 0 degree clock
Input Levels	Single-ended TTL & RS-422
Word Length (VWL)	Variable from 3 to 16 bits per word on a word-by-word basis
CRC checker	CRC16/CCITT
Minor Frame Length	2 to 65,536 words per minor frame
Major Frame Length	Up to 1024 minor frames per major frame
Bit Order	MSB or LSB-first (word-by-word basis)
Frame Sync Pattern	Up to 64 bits (any pattern with don't care bits (X) may be used)
Frame Sync Location	Beginning or end of the frame
Frame Sync Strategy	Adaptive mode (search-lock-verify) & burst mode (search-lock)
Sync Error Tolerance	0 to 15 bits (selectable)
Sync Slip Window	1, 3, 5, or 7 bits wide (selectable)
Data Polarity	Normal, inverted or automatic
Subframe Sync	FCC (FAC), SFID or URC (Optional)
URC Location	Any 64 bit window within the first minor frame not including the last bit in the minor frame
SFID Location	Any series of contiguous bits not including the last bit in the minor frame

### **IRIG A/B/G READER/GENERATOR:**

Time Reader Input Format	IRIG A, B, or G
Time Reader Rate	½, 1, or 2 times normal rate
Input signal level	1V p-p nominal
Latency	2µsec (maximum)
Data Outputs	Automatic time tags for PCM data blocks (time accessible in register space)
Time Generator Output	IRIG A, B, or G
Time Generator Rate	½, 1, or 2 times normal rate

### **MECHANICAL:**

PCIe	PCIe Board 7.55" Long
Daughterboard Form Factor	LS-40-DB for Bit Synchronizer

### **POWER REQUIREMENTS:**

5V	850 ma
-12V	120 ma
+12V	30 ma

### **PCM SIMULATOR:**

Outputs	Data, 0 degree clock & minor frame strobes
Output Levels TTL, 422	Single-ended TTL or RS-422 levels On PCM Data and Clock
Base-band Output Level	400 mV to 8 V p-p adjustable
Base-band Pre-mod Filter	16 Selectable; 5-pole Butterworth
Output Data Rate	64 bps to 20.0 Mbps (NRZ codes) 64 bps to 10.0 Mbps (all other codes)
PCM Codes	NRZ-L/M/S, BIφ-L/M/S DM-M/S, RNRZ-L (2 <sup>11</sup> -1, 2 <sup>15</sup> -1)
Word Length (VWL)	Variable from 3 to 16 bits per word on a word-by-word basis
CRC Generator	CRC16/CCITT
Minor Frame Length	2 to 32,767 words per minor frame
Major Frame Length	Up to 4,096 minor frames per major frame
Bit Order	MSB or LSB-first on a word-by-word basis
Frame Sync Pattern	Fully programmable
Sub-Frame Sync	Fully programmable
Common Words	May be a single value or selected from a group of one minor frame or 2048 words whichever is less. Unique Words Seven may be programmed in any mainframe, super-commutated, or subcommutated channel. Waveform Words Five may be programmed to appear in every frame at the same location.

### **BERT:**

Pseudo-random patterns	11, 15, 17, 19, 21, 23, and 25 bit
Bit Error Rate	Indicated on Software
Error Count	Indicated on Software
Forced Error Modes	Continuous Bit Errors Single Bit Error
History Log	Yes

### **ENVIRONMENTAL:**

Temperature (Operating)	10 to 50 °C
Temperature (Non-Op)	-25 to +70 °C
Humidity (Operating)	10% to 90% Non-Condensing
Humidity (Non-Op)	Packaging must prevent contact with moisture and contaminants
Special Handling	Standard ESD methods required