


Date	Revision History

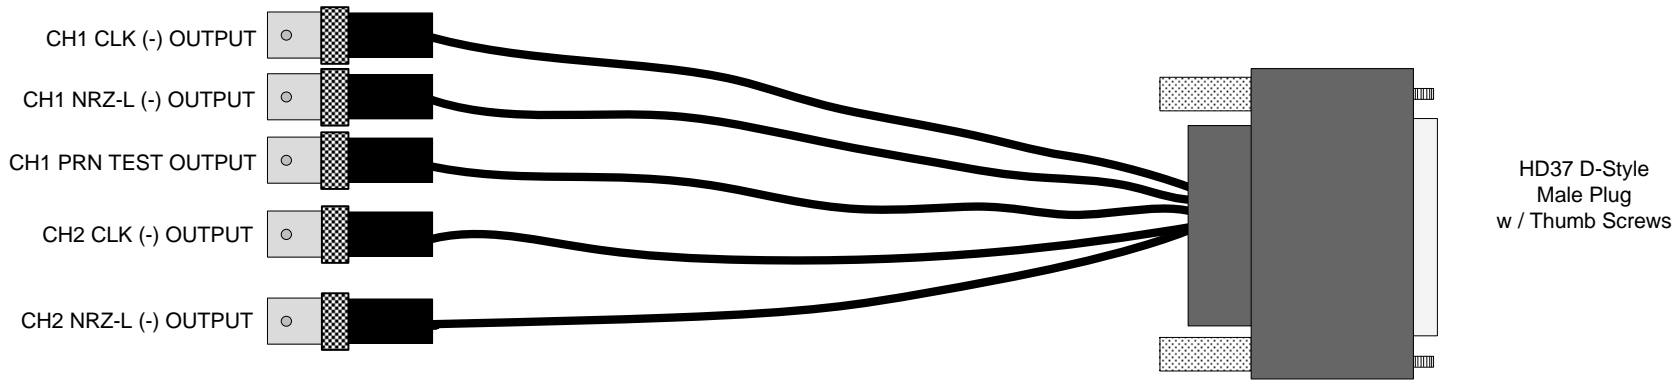

D-Style Connector Pin/ Contact No.	Label Text/Color	Pigtail Type	Signal Details
7	CH1 CLK (-) OUTPUT	BNC-F	CH1 BIT SYNC CLOCK OUTPUT (-)
6	CH1 NRZ-L (-) OUTPUT	BNC-F	CH1 BIT SYNC NRZ-L OUTPUT (-)
5	CH1 PRN TEST OUTPUT	BNC-F	CH1 PRN TEST OUTPUT
17	CH2 CLK (-) OUTPUT	BNC-F	CH2 BIT SYNC CLOCK OUTPUT (-)
16	CH2 NRZ-L (-) OUTPUT	BNC-F	CH2 BIT SYNC NRZ-L OUTPUT (-)
20-37	(N/A)	(N/A)	Ground

Assembly Notes:

- 1.) Apply signal labels near connector end of cable pigtails and secure with clear heat shrink.
- 2.) All signal cable pigtails to be constructed from RG-174, approximately 12" in length.
- 3.) Apply "LS-44 AUX I/O A" label to one side of D-connector housing and "C440101A" to the other side.

Lumistar Inc. 2701 Loker Ave West, Suite 230 Carlsbad, CA 92008 (760) 431-2181		
Title: LS-44-QBS Differential Interface Cable Assembly Drawing		
Size A	Document Number: C440101A	REV -
12/07/07		Sheet 1 of 1